


0.356in [9.0mm]




USE 10MM SOCKET FOR REACH NUT

STARTING IN 2021 ALL STRING POST LENGTHS ARE INDICATED ON TUNER SHANK.

0.970in [24.6mm]


0.529in [13.4mm]



0.891in [22.6mm]

COMPATIBLE WITH 13/32in [10mm] STRING POST HOLE

0.107in [2.7mm]



USE PILOT HOLE FOR #3 WOOD SCREW


0.158in [4.0mm]

0.313in [7.9mm] DISTANCE FROM CENTER OF STRING POST HOLE TO CENTER OF MOUNTING SCREW HOLE

.750 [19mm]

.787 [20mm]


.827 [21mm]

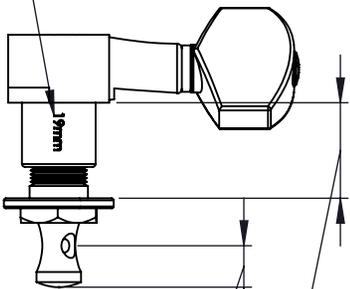

0.217in [5.5mm]


0.748in [19.0mm]

0.580in [14.7mm] MAX HEADSTOCK THICKNESS




0.788in [20.0mm]

0.619in [15.7mm] MAX HEADSTOCK THICKNESS




0.827in [21.0mm]

0.630in [16.0mm] MAX HEADSTOCK THICKNESS



Scale



0.500in [12.7mm] MIN HEADSTOCK THICKNESS (SAME FOR ALL TUNERS)

WEIGHT (WITH MOUNTING HARDWARE): 1.15oz [33g]

*Universal Mount Plate adds 1mm to headstock thickness.

THIS DRAWING IS THE SOLE PROPERTY OF HIPSHOT PRODUCTS, INC. ALL RIGHTS ARE RESERVED. DIMENSIONS AND PRODUCT FEATURES MAY CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCE: ± .005

REV DATE: 10/3/2020

6E0 CLASSIC CLOSED DIMENSIONS



8248 STATE ROUTE 96 Interlaken, NY 14847 U.S.A. TEL:607-532-9404 FAX:607-532-9530 E-MAIL: info@HipshotProducts.com